

DR4524

45W 24vdc Power Supply Unit


The DR4524 Power supply unit provides 24vdc power for eight Guardian 'GC' range Plant Control & Monitor units and an LCD-8 Display panel.

It is normally connected to MU20 Marshalling Unit on Terminals 1 and 2.

- Rail mounting
- Compact size,
- Simple plug and socket interconnections for 8 units
- Standard 0.5m screened 2-way cable with plug for directly powering a GC range controller
- Terminals for external site wiring connections



DR4524 93 x 67x 78 mm

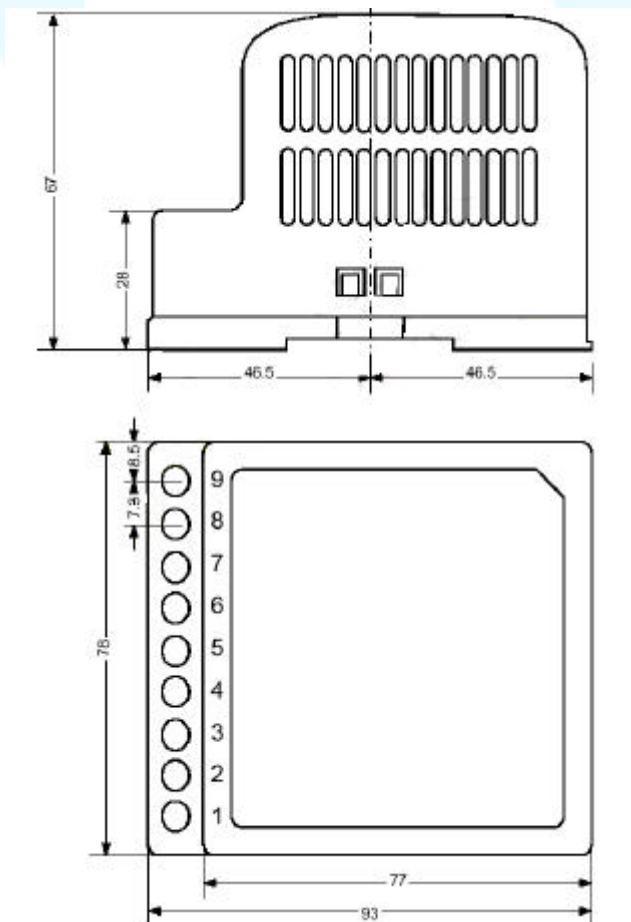

- TERMINAL PIN ASSIGNMENT
- PIN 1,2 : AC INPUT
 - PIN 3 : FG
 - PIN 4,5 : DC OUTPUT -V
 - PIN 6,7 : DC OUTPUT +V
 - PIN 8 : LED
 - PIN 9 : +V ADJ.

- INSTALL DIN RAIL TS35/7.5 OR TS35/15



SPECIFICATION		DR4524
Power		45W
Voltage	Input	100 to 230vac 1.5A
	Output	24Vdc/ac 2A
Frequency		50/60Hz
Operation		0 to 45 °C
Mounting		DIN rail
Size		H93, L67, D78 mm
Connectors Terminals		5.08mm 2 x 5-way Fixed Screw clamp
Approvals		CE UL
Order Part Nos.		DR4524 - GC0025